


# LINKO®

— Since 2008 —

## K-60

Dual/Four/Five  
i3200 Print Heads Optional

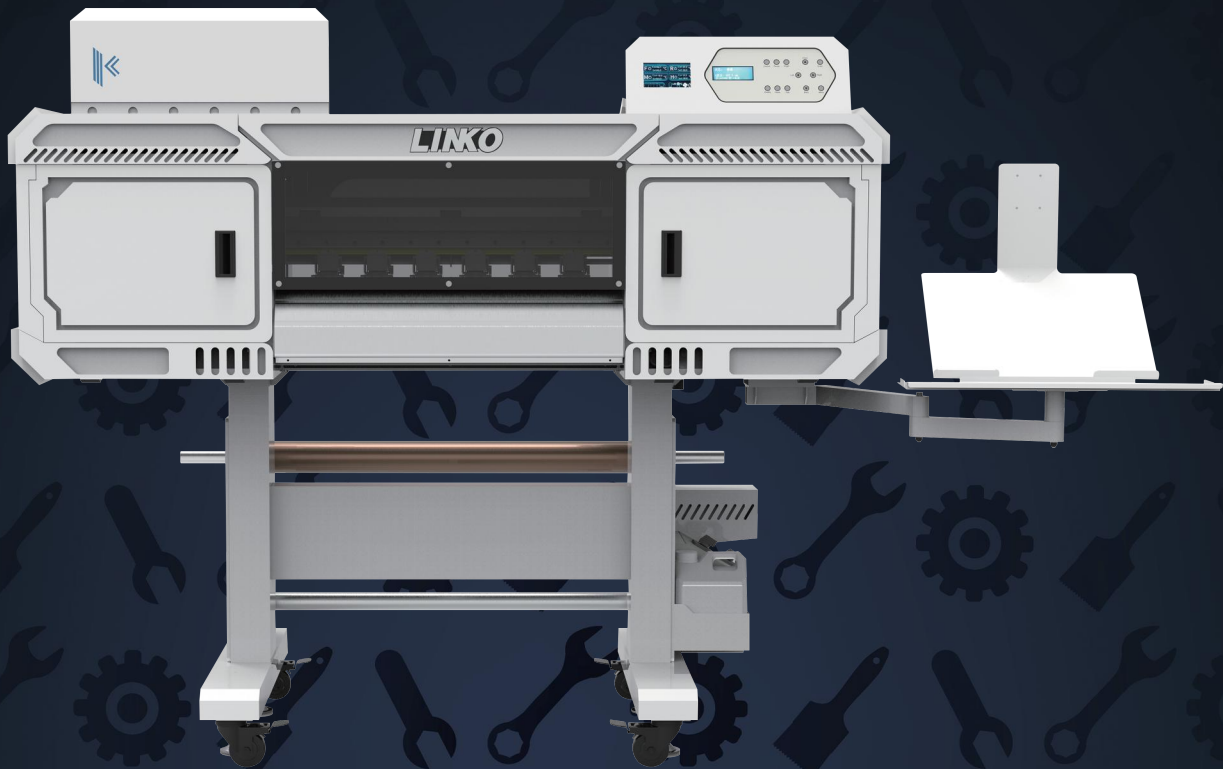

## A1 DTF Printer (Direct to Film) K-60

- Independent White Ink Circulation: Keeps the print head primed and prevents clogs, even after shutdown.
- 1.8L High-Capacity Ink Tank: Reduces refills and ensures uninterrupted production.
- Air expansion shaft unwinding system: Provides more precise tension control, smoothly feeds 300M of film, with stable stepping and no deviation.
- Dual Electric and Manual Lifting Mechanisms: provide flexibility and ease of use.
- Heavy-Duty Build: 30-50KG heavier than standard machines with a robust frame for stability and durability.



Verified



## Linko Specification

Model	K-602	K-604	K-605
Print Head	i3200A1*2	i3200A1*4	i3200A1*5
Print Speed	13m <sup>2</sup> /h   139.93ft <sup>2</sup> /h	25m <sup>2</sup> /h   269.1ft <sup>2</sup> /h	30m <sup>2</sup> /h   322.92ft <sup>2</sup> /h
	10m <sup>2</sup> /h   107.64ft <sup>2</sup> /h	20m <sup>2</sup> /h   215.28ft <sup>2</sup> /h	25m <sup>2</sup> /h   269.1ft <sup>2</sup> /h
	6m <sup>2</sup> /h   64.58ft <sup>2</sup> /h	12m <sup>2</sup> /h   129.17ft <sup>2</sup> /h	16m <sup>2</sup> /h   172.22ft <sup>2</sup> /h
Print Resolution	4Pass: 720*1200dpi,6Pass: 720*1800dpi,8Pass: 720*2400dpi		
Available width	≤650mm   ≤25.59"		
Print media	DTF Film,heat transfer paper,PP paper		
Ink color	CMYK+W/CMYK+W+RD+BU+GR+OR		
Temperature	22°C-28°C   71.6°F-82.4°F		
Humidity	35%-65%		
Capacity	1800ml/color, Waste ink bottle: 3000ml/bottle		
Print Interface	Gigabit network port,laptop needs Gigabit adapter		
RIP Software	PrintFactory/Photo Print		
Operating System	Windows7/Windows10/Windows11,Mac OS10.0 to 14		
Electrical	220V/110V 1200W/2200W		
Dimensions	Machine	176.6cmx75cmx150cm   69.53"x29.53"x59.06"	
	Package	K-602	187cm x 100cm x 75cm/73.62"x39.37"x29.53"
		K-604	187cm x 100cm x 75cm/73.62"x39.37"x29.53"
		K-605	Printer: 187cmx98cmx72cm   73.62"x38.58"x28.35" Stand: 138cmx83cmx98cm   54.33"x32.68"x38.58"
Weight	K-602	N.W: 200KG   440.92lb, G.W: 245KG   540.13lb	
	K-604	N.W: 200KG   440.92lb, G.W: 245KG   540.13lb	
	K-605	N.W: 240KG   529lb G.W: Printer 211KG   465.17lb,Stand 112.5KG 248.02lb	

## Linko Features

- Automatic moisturizing and nozzle automatic compensation system is optional
- The print head bottom plate is heated with two heating strips, which can keep the print head working at the appropriate temperature, prevent ink from flying, and ensure uniform ink dot printing to ensure good fluidity of the DTF ink to improve the printing performance with great quality.
- Optional automatic stop printing when cover is opened, 3 holes are reserved on the cover
- Dual power motors control the retraction and unloading of PET Film
- The cover can be opened at the back to facilitate the removal of the chain

Web: [www.dtflinko.com](http://www.dtflinko.com)  
 Email: [etro@dtflinko.com](mailto:etro@dtflinko.com)  
 Phone: +86 135 7066 8687 +86 136 3123 0726



Linko Printer



LinkoPrinter



Linko DTF Printer



dtflinko.com

